




CAUTION

## Precautions

- Use this chair indoors.
- Tighten loosened screws when needed.
- Sitting on this chair while wetting or sweating might make the seating fabric color run on your clothes.
- Strong friction while you are sitting or the seating fabric is in wet condition with water or sweat might make the seating fabric color run on other things.
- Washing the seating fabric in water might cause shrinking, color fading, or removal of adhesive. Dry-clean it when it gets dirty.
- Replace those deformed seat pipes or pipe caps with new parts. Replace the seating fabric with the new one when it is torn.
- Handle this chair with care when using this chair on a wooden floor, carpet mat, or Japanese tatami floor, or floors could be damaged with scratches or dents.
- Do not handle this chair roughly or use for purposes other than sitting.
- Do not disassemble or modify this product.
- Placing this chair under direct sunlight or around a heater for a longer time could change its color or cause deformation due to light or heat.
- Do not use this chair on an unstable place, such as on a tilted or soft floor.
- Avoid applying excessive load on one side because it might cause you to fall.
- Lift the chair up when moving it so that it is not dragged on the floor. Failing to do so could damage the floor surface.
- Be careful when using the rocking type so as not to catch your foot or hand between the chair legs and the floor.
- Opening and closing while holding the joint parts of the chair frame and the chair leg might cause injuries by pinching your fingers. Do not hold these parts when opening or closing the chair.

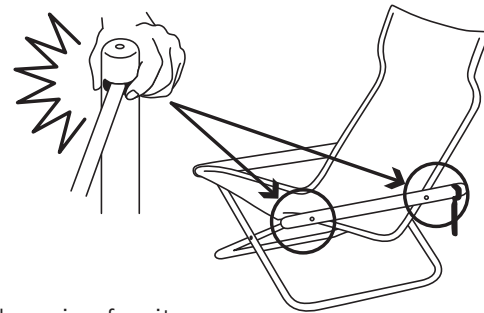

## Maintenance

- Frames : Wipe them by using a dry cloth. Clean them by using furniture cleaner or liquid soap when significantly contaminated.
- Seating fabric : Dry-clean the seating fabric when it is significantly contaminated. Washing this fabric in water might cause shrinking, color fading, or removal of adhesive.

## Quality Indication

Product name		Nychair X	Nychair X Rocking
Variable structure		Foldable	Foldable
Dimensions (mm)		Width 610 x Depth 765 x Height 860	Width 610 x Depth 760 x Height 920
Seating height (mm)		255	310
Components	Seating fabric	Cotton 100%	Cotton 100%
	Backrest (side core materials)	Metal (Steel)	Metal (Steel)
	Wooden part	Natural wood	Natural wood
	Chair legs	Metal (Stainless-steel)	Metal (Stainless-steel)
Surface processing	Backrest (side core materials)	Acrylic coating	Acrylic coating
	Wooden part	Urethane coating	Urethane coating
Country of origin		Japan	Japan

2021.11

**FUJIEI**Fujiei Corporation 1-2-2, Tairamachi, Meguro-ku, TOKYO, 152-0032, JAPAN  
E-mail: fmk@fujiei.co.jp WEB: www.fujiei.co.jpOfficial WEB SITE  
www.nychairx.jp

Nychair X™

Nychair X™ Rocking

## Assembly and Instruction Manual

Thank you for purchasing our product.


Read all parts and precautions on this manual thoroughly before using this product for the safety purpose.

Check each part and component before assembling this chair, while following each instruction.


Keep this instruction manual after reading it.

### Completion drawing

#### Nychair X



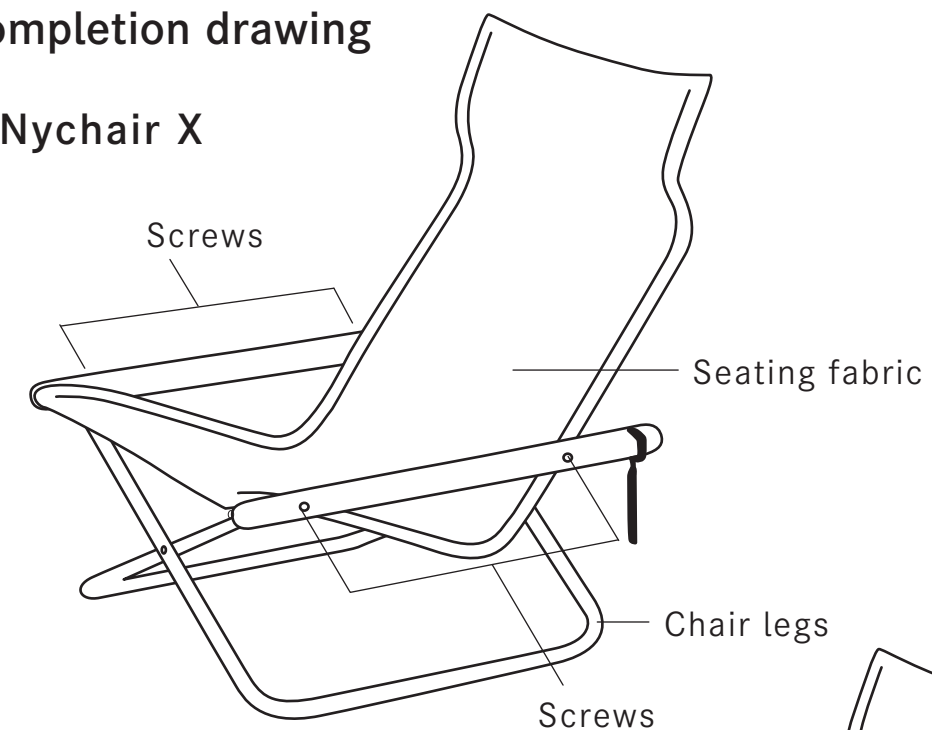


#### Nychair X Rocking



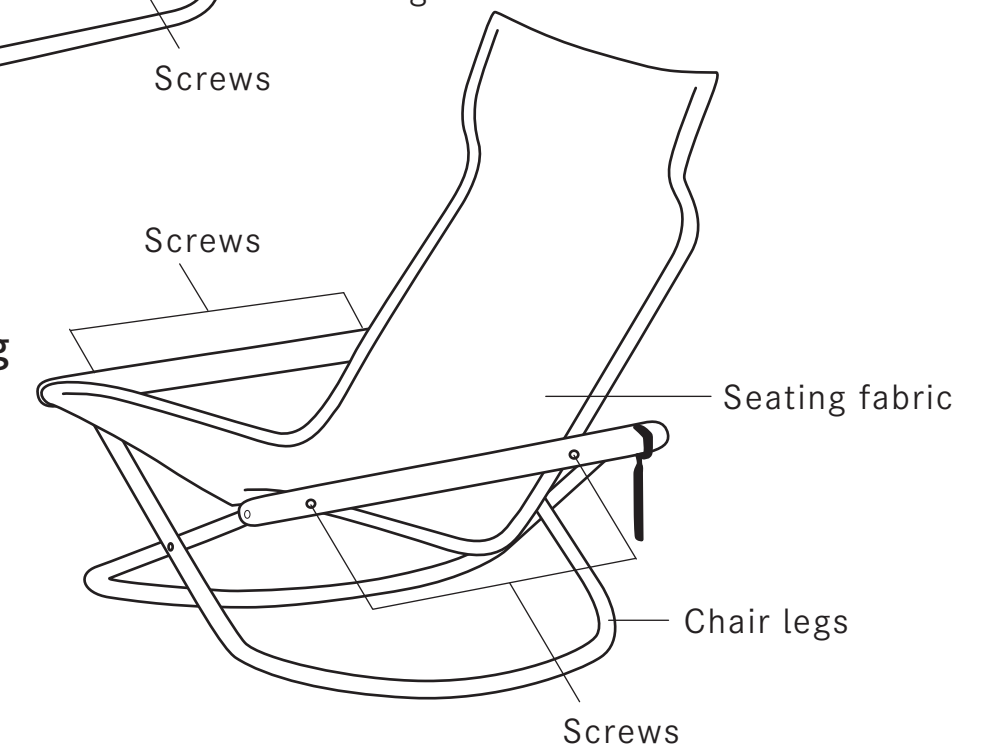



**Assembly Components** (Check all components and the quantity of each component before assembly)

Nychair X

4 screws	A pair of chair legs	Seating set
 Philips-head screw	 Arm rest Leg pipes Hanging string	 Seating fabric Pipe (inserted)

Nychair X Rocking


4 screws	A pair of chair legs	Seating set
 Philips-head screw	 Arm rest Leg pipes Hanging string	 Seating fabric Pipe (inserted)

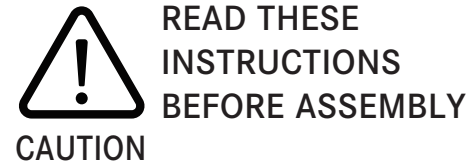


**READ THESE INSTRUCTIONS BEFORE ASSEMBLY**

- \*Prepare a Philips-head screw driver before assembly.
- \*Do not use any electrical tools.
- \*Ensure an enough space for assembly, and lay something to protect the floor surface.

**2 Adjust properly the position of screws with your hand**

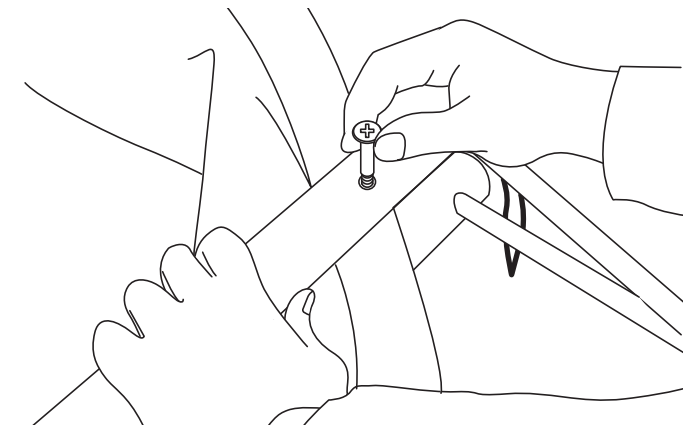

Align the screw hole on the leg pipe with the screw hole on the armrest so that a screw can sit straight in the hole. First turn the screw a few times with your hand, not with the screw driver, to temporarily fix it. Do the same with the opposite side.

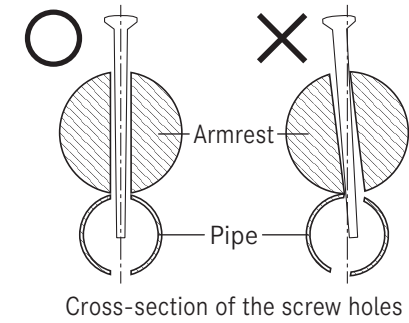


**PRECAUTIONS FOR ASSEMBLY**

- \*Tightening the screw inserted at a tilt could deform and damage the screw holes. Insert the screw straight after fitting both screw holes straight.
- \*When the screw is not inserted easily, loosen it and retighten it gradually.

**Assembly Procedure** (for Nychair X and Nychair X Rocking)

- 1 Place the components on their side on a sheet laid on the floor, with both the back rest of the seating fabric and the hanging string of chair legs on the same side as shown in the drawing below. Align the screw holes, taking care of the position of each hole.**

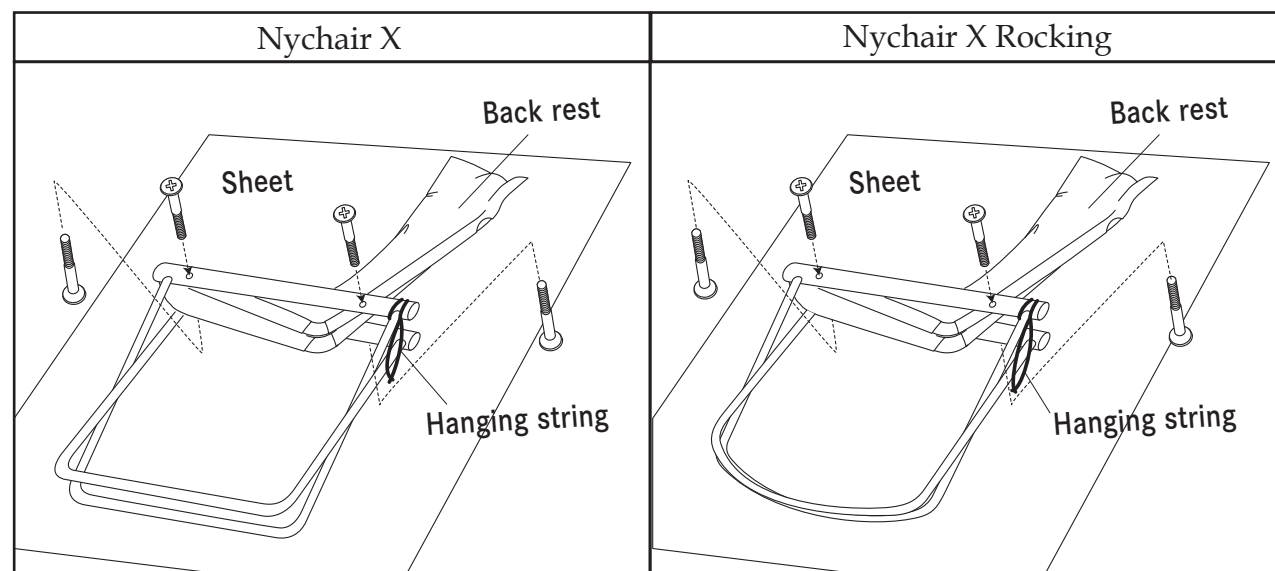


Have the supplied four screws ready




**Precautions: Attaching the back rest on the front side of legs can cause the chair to topple over. Ensure that the back rest is in correct position.**

**3 Tighten the screws with the screw driver**

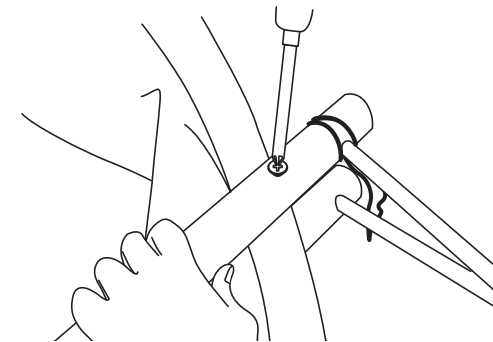

After you have tightened temporarily all the four screws, tighten them with the screw driver until they penetrate into the leg pipe

**4 Raise up and open the chair**

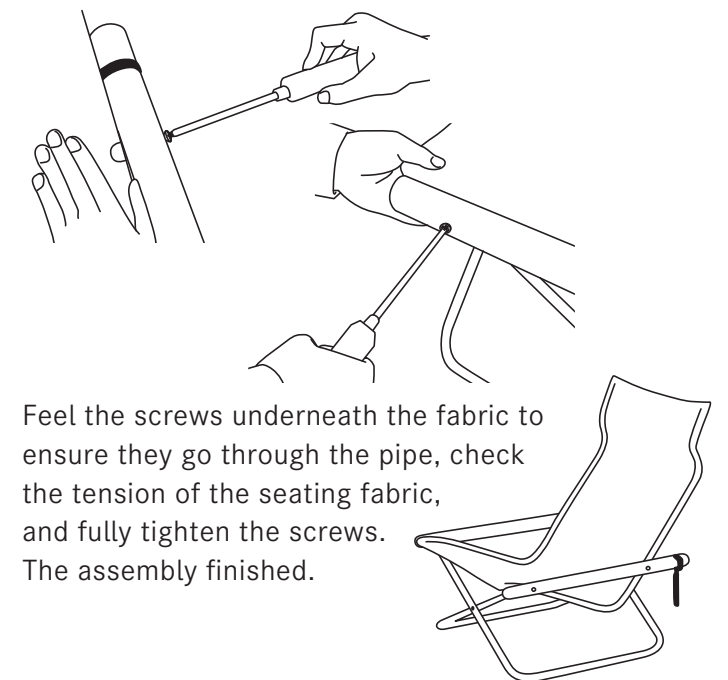

Feel the screws underneath the fabric to ensure they go through the pipe, check the tension of the seating fabric, and fully tighten the screws. The assembly finished.

**How to use the hanging string**

Hang the hanging string to the armrest end when the chair is folded.

